


SUGGESTED RAMP BERM EXIT PLATE
8"/12" DECK TO GRADE/DB/RESILIENT SURFACING INSTALLATION
REFER TO RAMP BERM EXIT PLATE INSTALLATION SHEET

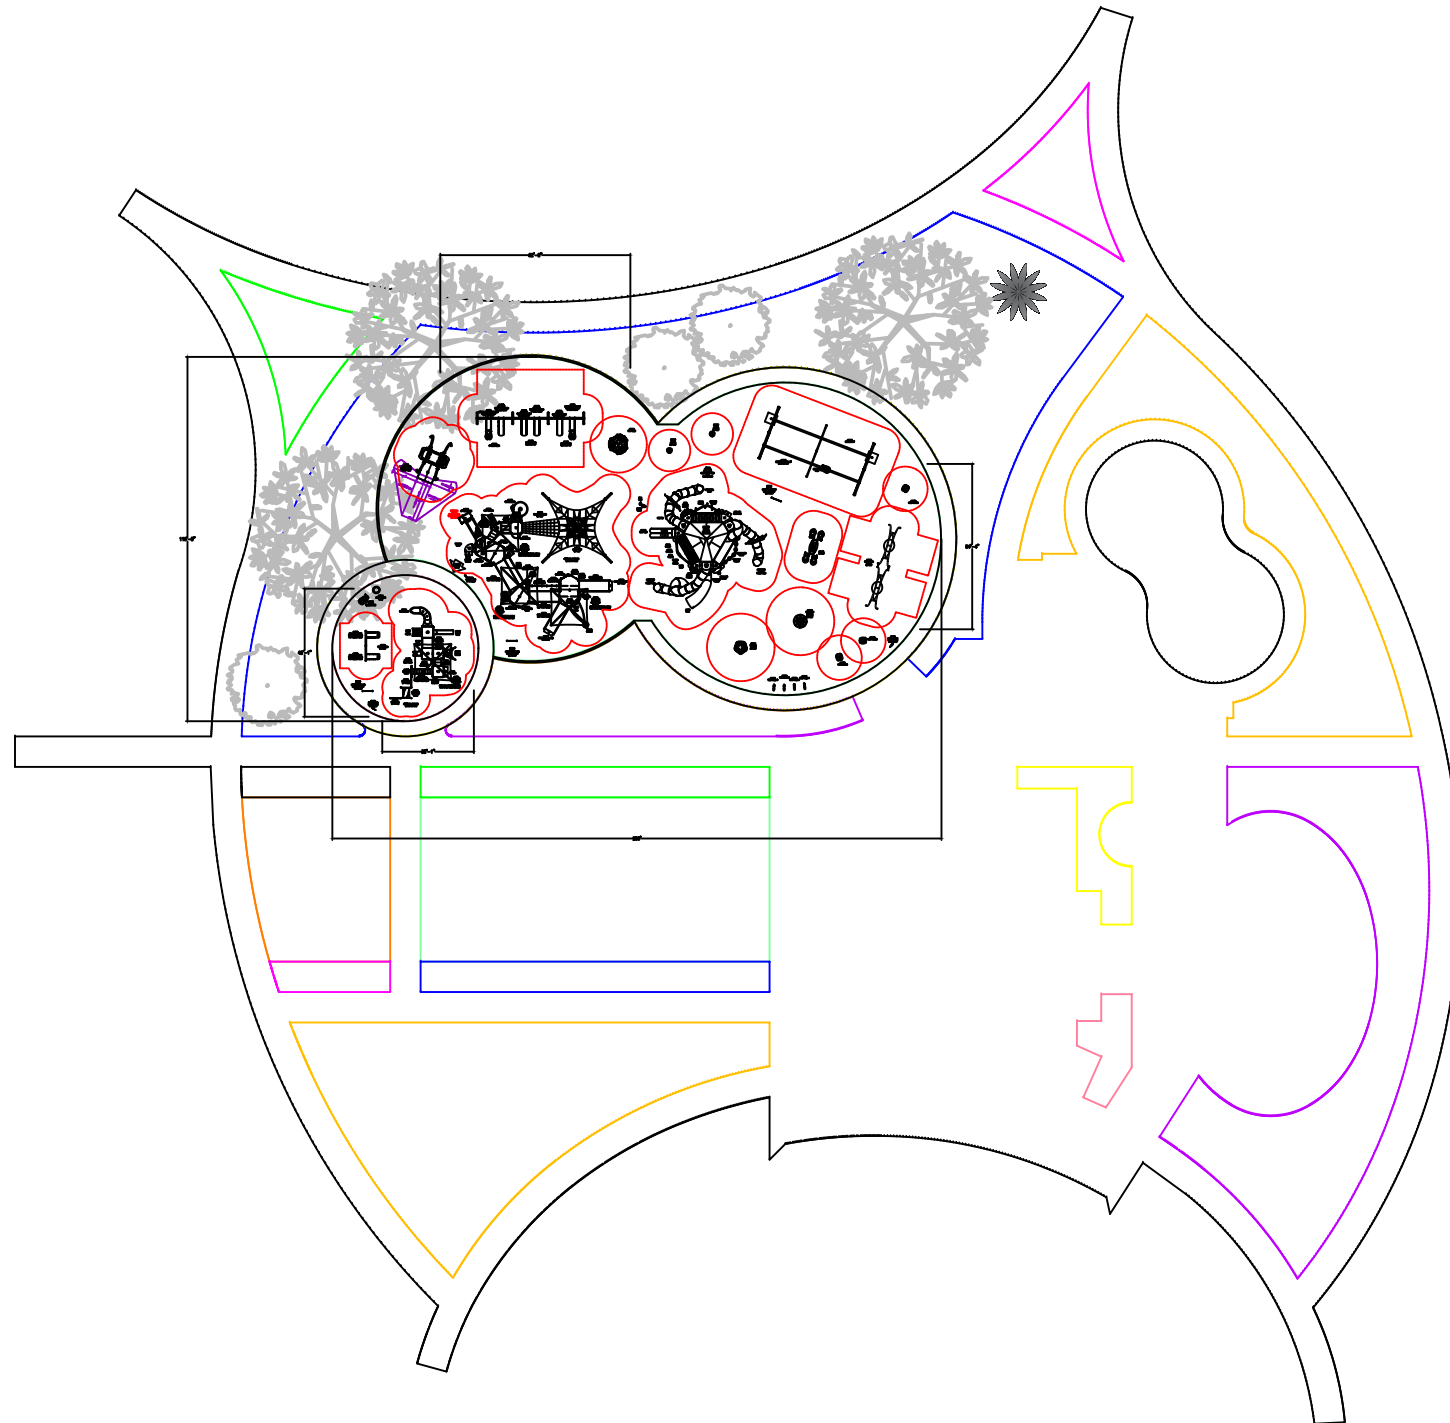

5-12

PlayArea and Ramp Play
on the Ramp To the Top

TOTAL ELEVATED PLAY COMPONENTS	32		
TOTAL ELEVATED COMPONENTS ACCESSIBLE BY RAMP	8	REQUIRED	8
TOTAL ELEVATED COMPONENTS ACCESSIBLE BY TRANSFER	21	REQUIRED	8
TOTAL ACCESSIBLE GROUND LEVEL COMPONENTS SHOWN	28	REQUIRED	9
TOTAL DIFFERENT TYPES OF GROUND LEVEL COMPONENTS	17	REQUIRED	17

2-5

PlayArea and Ramp Play
on the Ramp To the Top

TOTAL ELEVATED PLAY COMPONENTS	9		
TOTAL ELEVATED COMPONENTS ACCESSIBLE BY RAMP	0	REQUIRED	0
TOTAL ELEVATED COMPONENTS ACCESSIBLE BY TRANSFER	9	REQUIRED	5
TOTAL ACCESSIBLE GROUND LEVEL COMPONENTS SHOWN	6	REQUIRED	3
TOTAL DIFFERENT TYPES OF GROUND LEVEL COMPONENTS	5	REQUIRED	5

SLR
landscape
structures



The play components identified on this plan are IPEMA certified. (Unless model number is preceded with *) The use and layout of these components conform to the requirements of ASTM F1487. To verify product certification, visit www.ipema.org

THIS PLAY AREA & PLAY EQUIPMENT IS
DESIGNED FOR AGES 2-12 YEARS
UNLESS OTHERWISE NOTED ON PLAN.

IT IS THE MANUFACTURERS OPINION THAT
THIS PLAY AREA DOES CONFORM TO
THE A.D.A. ACCESSIBILITY STANDARDS,
ASSUMING AN ACCESSIBLE PROTECTIVE
SURFACING IS PROVIDED, AS INDICATED, OR
WITHIN THE ENTIRE USE ZONE.

THIS CONCEPTUAL PLAN WAS BASED ON
INFORMATION AVAILABLE TO US. PRIOR TO
CONSTRUCTION, DETAILED SITE INFORMATION
INCLUDING SITE DIMENSIONS, TOPOGRAPHY, EXISTING
UTILITIES, SOIL CONDITIONS, AND DRAINAGE
SOLUTIONS SHOULD BE OBTAINED, EVALUATED, &
UTILIZED IN THE FINAL DESIGN. PLEASE VERIFY ALL
DIMENSIONS OF PLAY AREA, SIZE, ORIENTATION, AND
LOCATION OF ALL EXISTING UTILITIES, EQUIPMENT,
AND SITE FURNISHINGS PRIOR TO ORDERING. SLIDES
SHOULD NOT FACE THE HOT AFTERNOON SUN.

CHOOSE A PROTECTIVE SURFACING MATERIAL THAT
HAS A CRITICAL HEIGHT VALUE TO MEET THE
MAXIMUM FALL HEIGHT FOR THE EQUIPMENT (REF.
ASTM F1487 STANDARD CONSUMER SAFETY
PERFORMANCE SPECIFICATION FOR PLAYGROUND
EQUIPMENT FOR PUBLIC USE, SECTION 8 CURRENT
REVISION). THE SUBSURFACE MUST BE WELL
DRAINED. IF THE SOIL DOES NOT DRAIN NATURALLY
IT MUST BE TILED OR SLOPED 1/8" TO 1/4" PER
FOOT TO A STORM SEWER OR A "FRENCH DRAIN".

AREA OF
ACCESSIBLE/PROTECTIVE
SURFACING
(POURED-IN-PLACE SUGGESTED)

DESIGNED BY:

COPYRIGHT: 8/26/26
LANDSCAPE STRUCTURES INC.
601 7th STREET SOUTH
DELANO, MINNESOTA 55328
PH: 888-438-8574
playlsi.com

Date	Previous Drawing #	Initials



Commons Park

Landscape
Structures, Inc.

SYSTEM TYPE:
PlayBooster

DRAWING #:
1210036-01-01

