


SUGGESTED RAMP BERM EXIT PLATE
6" / 12" DECK TO GRADE / DR / RESILIENT SURFACING INSTALLATION
REFER TO RAMP BERM EXIT PLATE INSTALLATION SHEET

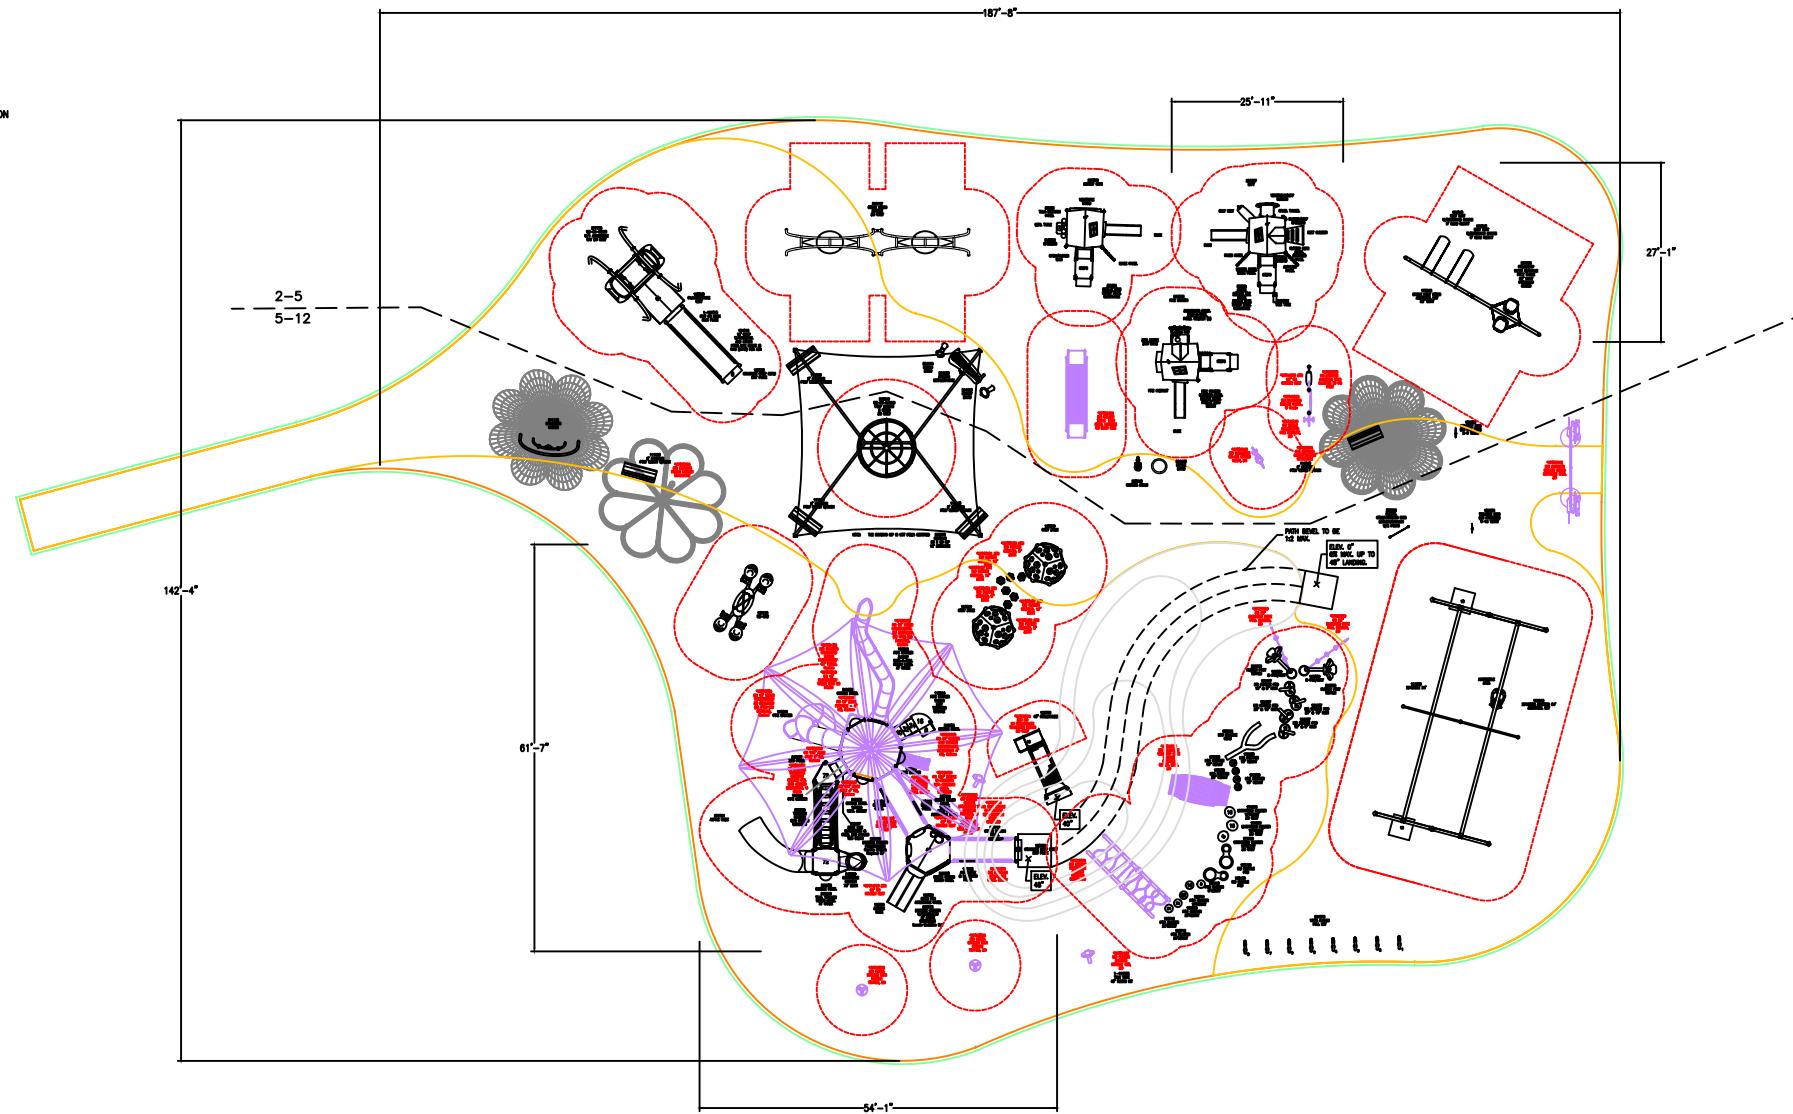


5-12 AREA

TOTAL ELEVATED PLAY COMPONENTS	17		
TOTAL ELEVATED COMPONENTS ACCESSIBLE BY RAMP	11	REQUIRED	9
TOTAL ELEVATED COMPONENTS ACCESSIBLE BY TRANSFER	6	REQUIRED	0
TOTAL ACCESSIBLE GROUND LEVEL COMPONENTS SHOWN	27	REQUIRED	0
TOTAL DIFFERENT TYPES OF GROUND LEVEL COMPONENTS	20	REQUIRED	20

2-5 AREA

TOTAL ELEVATED PLAY COMPONENTS	15		
TOTAL ELEVATED COMPONENTS ACCESSIBLE BY RAMP	0	REQUIRED	0
TOTAL ELEVATED COMPONENTS ACCESSIBLE BY TRANSFER	11	REQUIRED	8
TOTAL ACCESSIBLE GROUND LEVEL COMPONENTS SHOWN	30	REQUIRED	5
TOTAL DIFFERENT TYPES OF GROUND LEVEL COMPONENTS	23	REQUIRED	23



Rachel's Garden

Landscape
Structures, Inc.

SYSTEM TYPE:
PlayBooster/SmartPlay

DRAWING #:
1211781-01-01

landscape
structures



The play components identified on this plan are IPMA certified. (Unless model number is preceded with *) The use and layout of these components conform to the requirements of ASTM F1487. To verify product certification, visit www.ipma.org

THIS PLAY AREA & PLAY EQUIPMENT IS
DESIGNED FOR AGES 2-12 YEARS
UNLESS OTHERWISE NOTED ON PLAN.

IT IS THE MANUFACTURERS OPINION THAT
THIS PLAY AREA DOES CONFORM TO
THE A.D.A. ACCESSIBILITY STANDARDS,
ASSUMING AN ACCESSIBLE PROTECTIVE
SURFACING IS PROVIDED, AS INDICATED, OR
WITHIN THE ENTIRE USE ZONE.

THIS CONCEPTUAL PLAN WAS BASED ON
INFORMATION AVAILABLE TO US. PRIOR TO
CONSTRUCTION, DETAILED SITE INFORMATION
INCLUDING SITE DIMENSIONS, TOPOGRAPHY, EXISTING
UTILITIES, SOIL CONDITIONS, AND DRAINAGE
SOLUTIONS SHOULD BE OBTAINED, EVALUATED, &
UTILIZED IN THE FINAL DESIGN. PLEASE VERIFY ALL
DIMENSIONS OF PLAY AREA, SIZE, ORIENTATION, AND
LOCATION OF ALL EXISTING UTILITIES, EQUIPMENT,
AND SITE FURNISHINGS PRIOR TO ORDERING. SLIDES
SHOULD NOT FACE THE HOT AFTERNOON SUN.

CHOOSE A PROTECTIVE SURFACING MATERIAL THAT
HAS A CRITICAL HEIGHT VALUE TO MEET THE
MAXIMUM FALL HEIGHT FOR THE EQUIPMENT (REF.
ASTM F1487 STANDARD CONSUMER SAFETY
PERFORMANCE SPECIFICATION FOR PLAYGROUND
EQUIPMENT FOR PUBLIC USE, SECTION 8 CURRENT
REVISION). THE SUBSURFACE MUST BE WELL
DRAINED. IF THE SOIL DOES NOT DRAIN NATURALLY
IT MUST BE TILED OR SLOPED 1/8" TO 1/4" PER
FOOT TO A STORM SEWER OR A "FRENCH DRAIN".

DESIGNED BY:

COPYRIGHT: 9/16/26
LANDSCAPE STRUCTURES, INC.
601 7th STREET SOUTH - P.O. BOX 198
DELANO, MINNESOTA 55328
PH: 1-800-328-0035 FAX: 1-763-972-6091

Date Previous Drawing # Initials

