


## NOTES


1. Valve must be installed on supply line to regulate flow.
2. Concrete mounting surface for structure installation needs to be level and flat.
3. Supply line is based on the designated flow rates for structure.
4. Underground plumbing to be designed for winterization.
5. Consult local electrical inspector for grounding.
6. Concrete to be rated for 4000 psi minimum before installing structure. Approx. 28 days of curing to reach rate.
7. Product may require a strainer on the water feed line. Consult with manufacturer.
8. Product specifications are subject to change.

## TOP VIEW



Body rotates left and right  
360°, 180°, or 90°  
(no up and down  
movement)


## SIDE VIEW

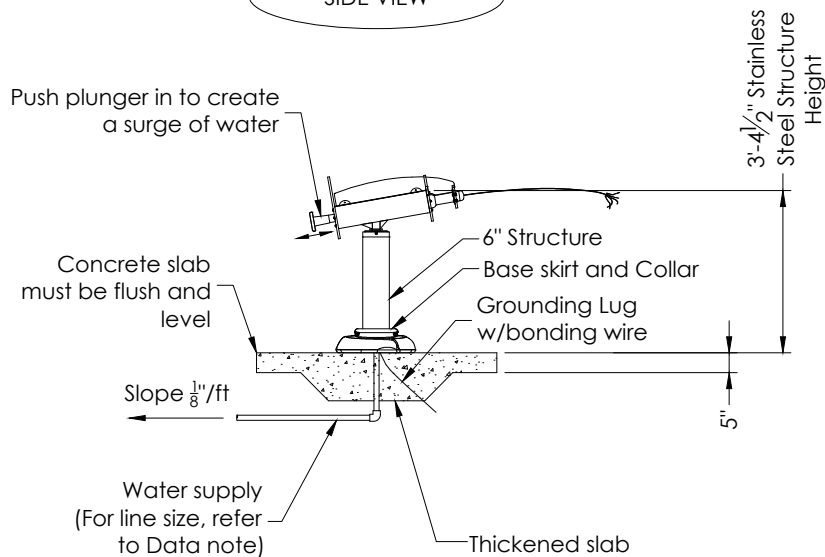

\*\*Dimensions are given for stainless steel structure. Acrylic accents may add to overall height\*\*

\*\*Not for Construction\*\*

## SPLASH ZONE

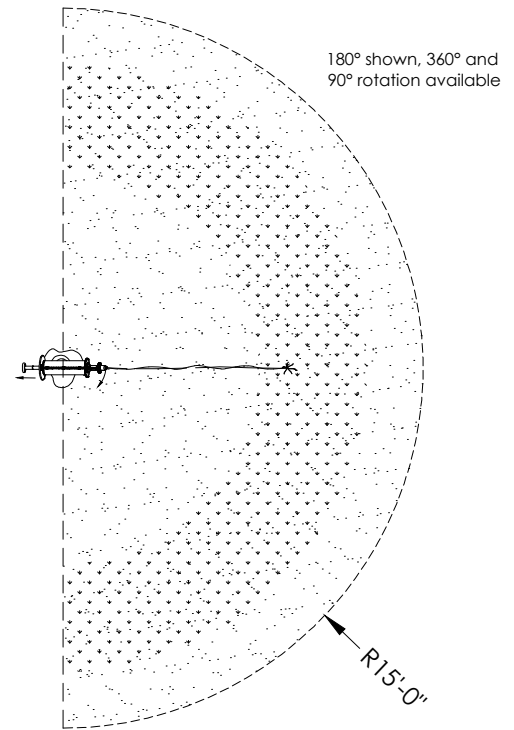

Splash Zone-Not to Scale

### Splash Zone Notes:

Splash zones are approximate, actual splash may vary based on various environmental conditions, flow rates, slope of splash pad, submergence depth and wind.

## PRODUCT OPTIONS

### Structure:

Stainless Steel Fabrication.  
(see specification for details)

Acrylic Accents  
(see specification for details)

Skirt  
Fiberglass Fabrication  
(see specification for details)

Collar  
Urethane  
(see specification for details)

## DATA

Flow: 5 GPM  
Pressure: 4 PSI  
Supply Line: 1" Pipe  
Installation: Flange Mount to Concrete  
Height with Acrylic: 3'-8"



1101 McKinley Parkway  
Delano, MN 55328  
888-438-6574  
763-972-5200  
aquatix.playlsi.com

## JETSTREAM

DRAWN BY	CTS	SCALE	1/4" = 1'-0"	DATE	11/12/18
REVISED BY	NCS	REVISION LETTER	C	REVISION DATE	1/31/25

This drawing is issued in confidence for engineering information only. This drawing shall remain the property of Aquatix and may not be reproduced, disclosed to a third party, or used to manufacture anything without direct written permission from Aquatix. Unauthorized use shall entitle Aquatix to all damages caused by such user including preparation charges, lost profits, damage to reputation and attorney's fees.