




TOP VIEW




Connection Detail

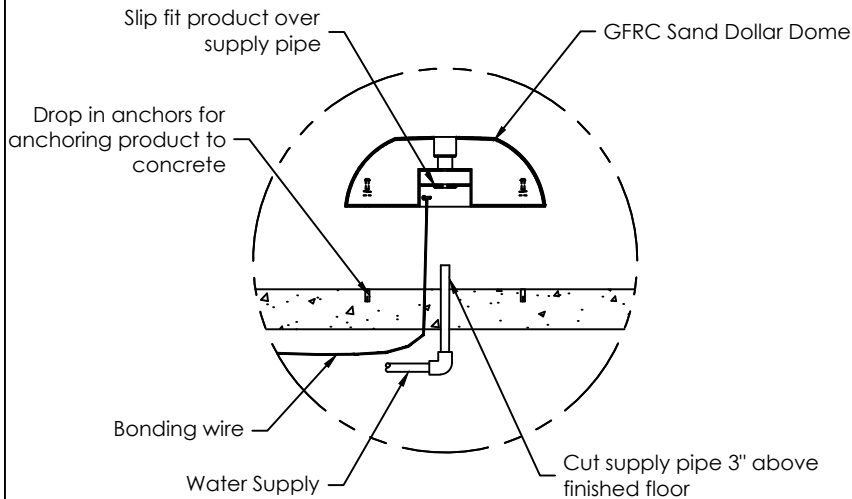

Elevation

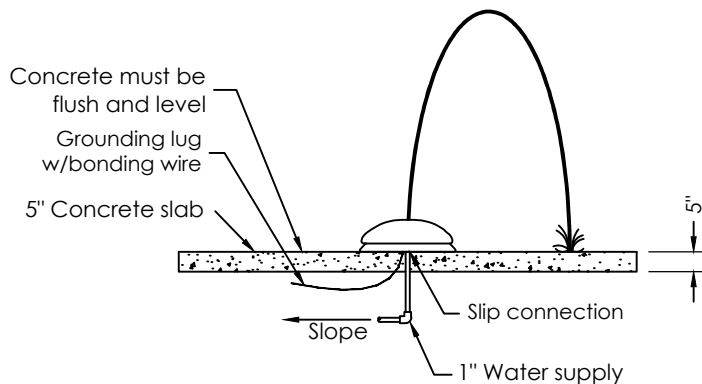

SPLASH ZONE

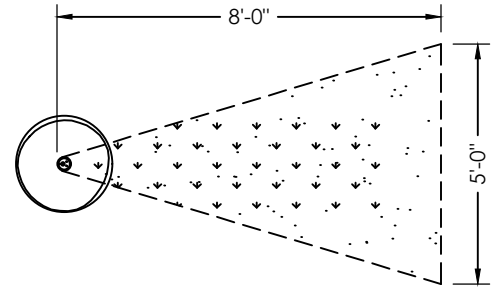

Splash Zone-Not to Scale

Splash Zone Notes:

Splash zones are approximate, actual splash may vary based on various environmental conditions, flow rates, slope of splash pad and submergence depth.

Construction Details

Built with internal stainless steel armature, Solid pour GFRc concrete. Theme painted and Clear Coat. Surface mount to concrete pad. Included grounding lug and mounting anchors.

Design Details

Sand Dollar Dome - Approximately Ø24" x 8" H
Single Arch Jet spray from center

DATA

High Flow: 10 GPM
Low Flow: 5 GPM
Ultra Flow: 1 GPM
Pressure: 3 PSI
Supply Line: 1" Pipe

Not for Construction



1101 McKinley Parkway
Delano, MN 55328
888-438-6574
763-972-5200
aquatix.playlsi.com

SAND DOLLAR DOME

DRAWN BY	P.J.	SCALE	1/4" = 1' - 0"	DATE	5/17/23
REVISED BY	NCS	REVISION LETTER	B	REVISION DATE	2/10/2025

This drawing is issued in confidence for engineering information only. This drawing shall remain the property of Aquatix and may not be reproduced, disclosed to a third party, or used to manufacture anything without direct written permission from Aquatix. Unauthorized use shall entitle Aquatix to all damages caused by such user including preparation charges, lost profits, damage to reputation and attorney's fees.