


THIS DRAWING HAS A SKYWAYS
SHADE ON IT, A SEPARATE
FREIGHT QUOTE FROM DALLAS
SKYWAYS FACILITY IS REQUIRED

SKYWAYS SHADE NOTES:
BUILDING CODE IBC 2015
WIND LOAD OF 105 MPH
160 MPH WIND LOAD FRAME ONLY-NO FABRIC
SNOW LOAD OF 5 PSF-DOES NOT INCLUDE SNOW DRIFT
PROPER ACCESS TO SITE FOR MATERIALS & EQUIPMENT DELIVERY
STANDARD COLOR FABRIC
PRICE INCLUDES ANCHOR BOLTS (NON-GALVANIZED) IF REQUIRED
PRICE INCLUDES GENERIC SEAL DRAWINGS (ELECTRONIC FORMAT ONLY)
PRICE INCLUDES ZINC RICH PRIMER
USE OR SALES TAX NOT INCLUDED
INSTALLATION NOT INCLUDED
ALL COMPONENTS TO BE SHIPPED AT THE SAME TIME

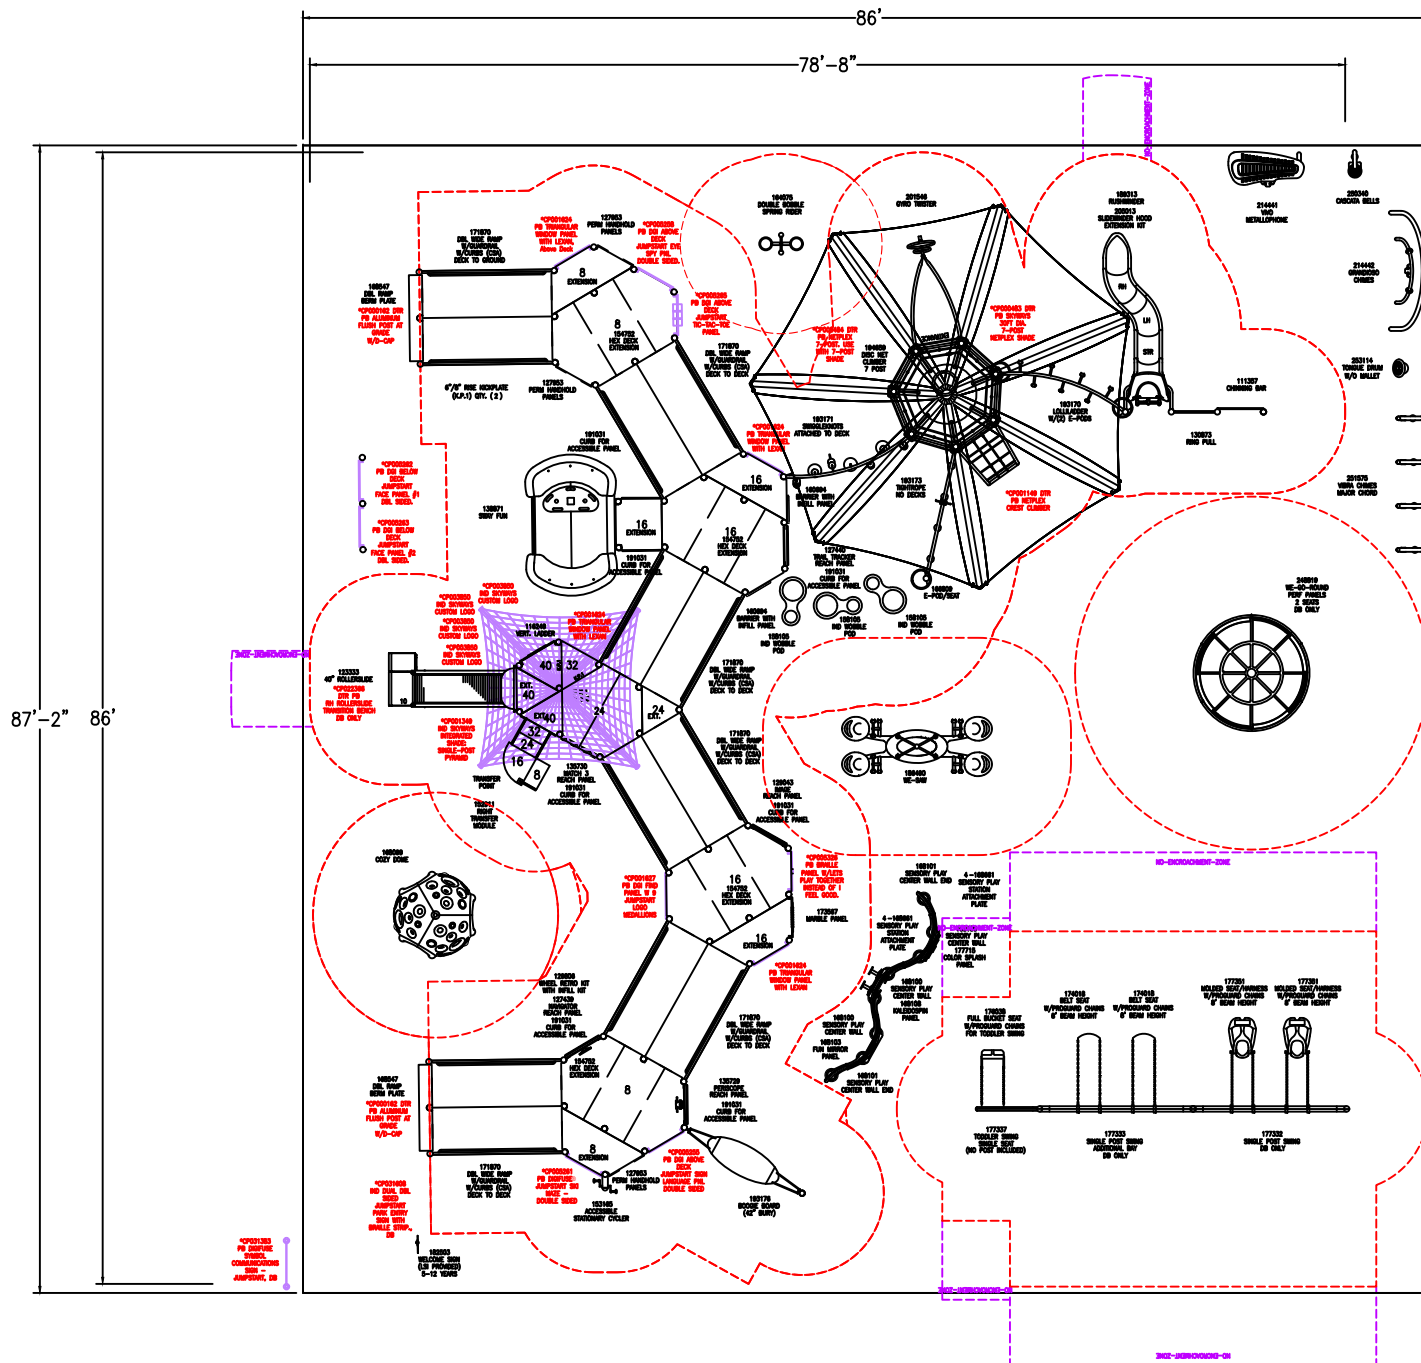

PlayBooster®
G-12 years
Max Fall Height: 96 inches

| | | | |
|--|----|----------|----|
| TOTAL ELEVATED PLAY COMPONENTS | 17 | | |
| TOTAL ELEVATED COMPONENTS ACCESSIBLE BY RAMP | 15 | REQUIRED | 9 |
| TOTAL ELEVATED COMPONENTS ACCESSIBLE BY TRANSFER | 2 | REQUIRED | 0 |
| TOTAL ACCESSIBLE GROUND LEVEL COMPONENTS SHOWN | 28 | REQUIRED | 0 |
| TOTAL DIFFERENT TYPES OF GROUND LEVEL COMPONENTS | 19 | REQUIRED | 19 |



Glencairn Neighborhood Recreation
Centre Playground and Spray Pad

Landscape
Structures, Inc.

SYSTEM TYPE:
PlayBooster

DRAWING #:
1189051-01-01



landscape
structures



The play components identified on this plan are IPEMA certified. (Unless otherwise noted) The use and layout of these components conform to the Canadian Standards Association (CSA) Standard CAN/CSA-Z814. To verify product certification, visit www.ipema.org.

THIS PLAY AREA & PLAY EQUIPMENT IS DESIGNED FOR AGES 5-12 YEARS UNLESS OTHERWISE NOTED ON PLAN.

IT IS THE MANUFACTURERS OPINION THAT THIS PLAY AREA DOES CONFORM TO THE A.D.A. ACCESSIBILITY STANDARDS, ASSUMING AN ACCESSIBLE PROTECTIVE SURFACING IS PROVIDED, AS INDICATED, OR WITHIN THE ENTIRE USE ZONE.

THIS CONCEPTUAL PLAN WAS BASED ON INFORMATION AVAILABLE TO US. PRIOR TO CONSTRUCTION, DETAILED SITE INFORMATION INCLUDING SITE DIMENSIONS, TOPOGRAPHY, EXISTING UTILITIES, SOIL CONDITIONS, AND DRAINAGE SOLUTIONS SHOULD BE OBTAINED, EVALUATED, & UTILIZED IN THE FINAL DESIGN. PLEASE VERIFY ALL DIMENSIONS OF PLAY AREA, SIZE, ORIENTATION, AND LOCATION OF ALL EXISTING UTILITIES, EQUIPMENT, AND SITE FURNISHINGS PRIOR TO ORDERING. SLIDES SHOULD NOT FACE THE HOT AFTERNOON SUN.

CHOOSE A PROTECTIVE SURFACING MATERIAL THAT HAS A CRITICAL HEIGHT VALUE TO MEET THE MAXIMUM FALL HEIGHT FOR THE EQUIPMENT (REF. ASTM F1487 STANDARD CONSUMER SAFETY PERFORMANCE SPECIFICATION FOR PLAYGROUND EQUIPMENT FOR PUBLIC USE, SECTION 8 CURRENT REVISION). THE SUBSURFACE MUST BE WELL DRAINED. IF THE SOIL DOES NOT DRAIN NATURALLY IT MUST BE TILED OR SLOPED 1/8" TO 1/4" PER FOOT TO A STORM SEWER OR A "FRENCH DRAIN".

AREA OF ACCESSIBLE/PROTECTIVE SURFACING (POURED-IN-PLACE SUGGESTED)

DESIGNED BY:

COPYRIGHT: 9/3/24
LANDSCAPE STRUCTURES, INC.
601 7th STREET SOUTH - P.O. BOX 198
DELANO, MINNESOTA 55328
PH: 1-800-328-0035 FAX: 1-763-972-6091

| Date | Previous Drawing # | Initials |
|------|--------------------|----------|
| | | |