


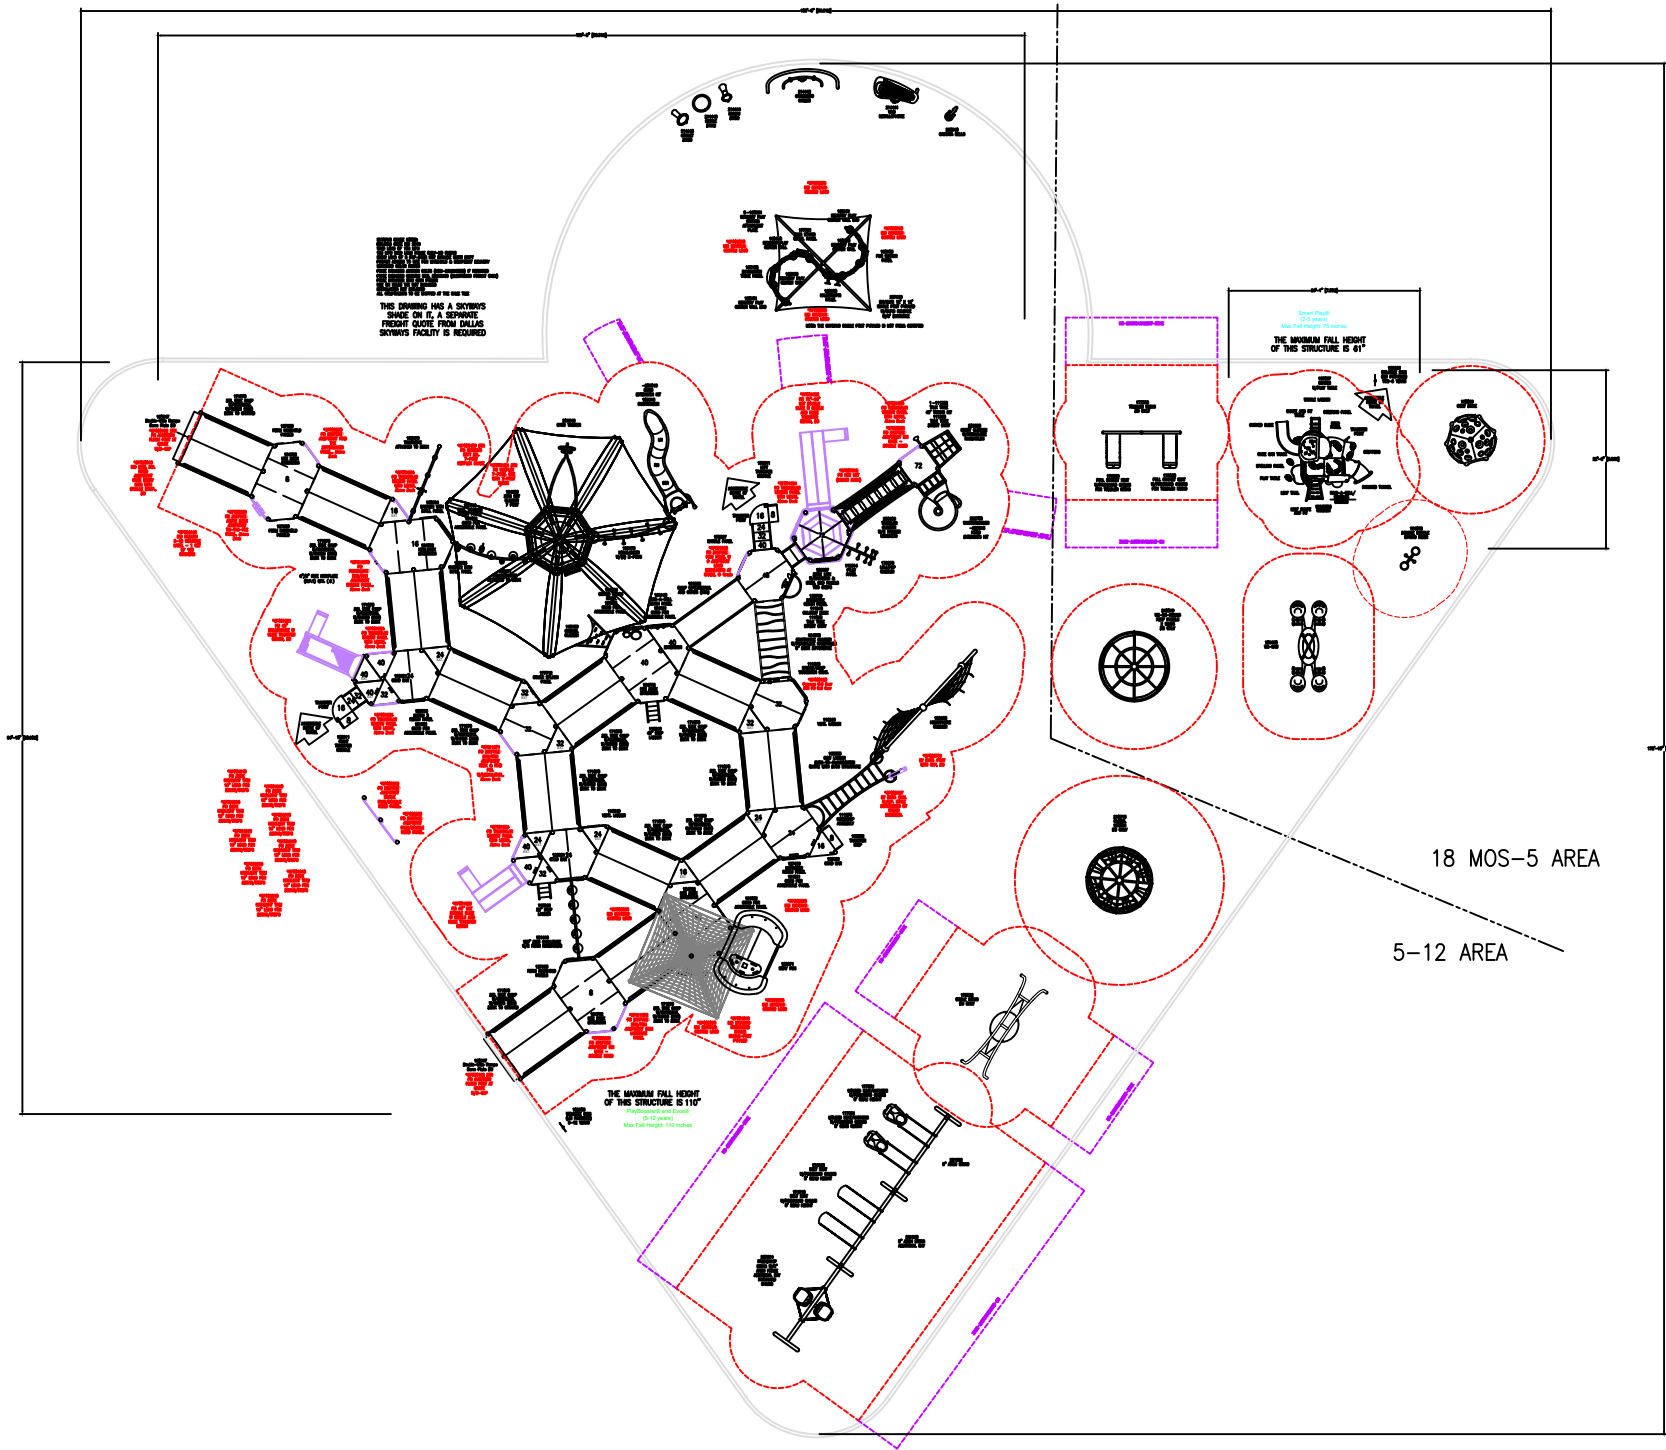

5-12 AREA

Estimated manufacturing time: 8 weeks from the time of LSI order acceptance, or receipt of sketches release of fabrication form if applicable.			
TOTAL ELEVATED PLAY COMPONENTS	36		
TOTAL ELEVATED COMPONENTS ACCESSIBLE BY RAMP	26	REQUIRED	9
TOTAL ELEVATED COMPONENTS ACCESSIBLE BY TRANSFER	33	REQUIRED	18
TOTAL ACCESSIBLE GROUND LEVEL COMPONENTS SHOWN	22	REQUIRED	12
TOTAL DIFFERENT TYPES OF GROUND LEVEL COMPONENTS	14	REQUIRED	14

18 MOS -5 AREA

TOTAL ELEVATED PLAY COMPONENTS	10		
TOTAL ELEVATED COMPONENTS ACCESSIBLE BY RAMP	0	REQUIRED	0
TOTAL ELEVATED COMPONENTS ACCESSIBLE BY TRANSFER	10	REQUIRED	5
TOTAL ACCESSIBLE GROUND LEVEL COMPONENTS SHOWN	9	REQUIRED	3
TOTAL DIFFERENT TYPES OF GROUND LEVEL COMPONENTS	8	REQUIRED	8

landscape
structures



The play components identified on this plan
are IPEMA certified. (Unless otherwise noted)
The use and layout of these components
conform to the Canadian Standards
Association (CSA) Standard CAN/CSA-2614.
To verify product certification, visit
www.ipema.org.

THIS PLAY AREA & PLAY EQUIPMENT IS
DESIGNED FOR AGES 18-144 MONTH
UNLESS OTHERWISE NOTED ON PLAN.

IT IS THE MANUFACTURERS OPINION THAT
THIS PLAY AREA DOES CONFORM TO
THE A.D.A. ACCESSIBILITY STANDARDS,
ASSUMING AN ACCESSIBLE PROTECTIVE
SURFACING IS PROVIDED, AS INDICATED, OR
WITHIN THE ENTIRE USE ZONE.

THIS CONCEPTUAL PLAN WAS BASED ON
INFORMATION AVAILABLE TO US. PRIOR TO
CONSTRUCTION, DETAILED SITE INFORMATION
INCLUDING SITE DIMENSIONS, TOPOGRAPHY, EXISTING
UTILITIES, SOIL CONDITIONS, AND DRAINAGE
SOLUTIONS SHOULD BE OBTAINED, EVALUATED, &
UTILIZED IN THE FINAL DESIGN. PLEASE VERIFY ALL
DIMENSIONS OF PLAY AREA, SIZE, ORIENTATION, AND
LOCATION OF ALL EXISTING UTILITIES, EQUIPMENT,
AND SITE FURNISHINGS PRIOR TO ORDERING. SLIDES
SHOULD NOT FACE THE HOT AFTERNOON SUN.

CHOOSE A PROTECTIVE SURFACING MATERIAL THAT
HAS A CRITICAL HEIGHT VALUE TO MEET THE
MAXIMUM FALL HEIGHT FOR THE EQUIPMENT (REF.
ASTM F1487 STANDARD CONSUMER SAFETY
PERFORMANCE SPECIFICATION FOR PLAYGROUND
EQUIPMENT FOR PUBLIC USE, SECTION 8 CURRENT
REVISION). THE SUBSURFACE MUST BE WELL
DRAINED. IF THE SOIL DOES NOT DRAIN NATURALLY
IT MUST BE TILED OR SLOPED 1/8" TO 1/4" PER
FOOT TO A STORM SEWER OR A "FRENCH DRAIN".

DESIGNED BY:

COPYRIGHT: 8/26/22
LANDSCAPE STRUCTURES, INC.
601 7th STREET SOUTH - P.O. BOX 198
DELANO, MINNESOTA 55328
PH: 1-800-328-0035 FAX: 1-763-972-6091

Date	Previous Drawing #	Initials
------	--------------------	----------

Parc Julie Hamelin

Landscape
Structures, Inc.

SYSTEM TYPE:
PlayBooster/SmartPlay

DRAWING #:
1166756-01-01

