



NOTES

1. Ground spray is designed to be encapsulated in concrete pad.
2. Supply line size is based on designed flow rate for structure.
3. A 20micron filter is required on the supply line.
4. Underground plumbing to be designed for winterization.
5. Consult local electrical inspector for proper installation of low voltage wiring and conduit.
6. Consult local electrical inspector for grounding.
7. Lighted pod comes standard with 100' cord
8. Requires junction box within 90' of feature
9. Do not exceed 20 feet per second velocity.
10. Product specifications are subject to change.

SPLASH ZONE

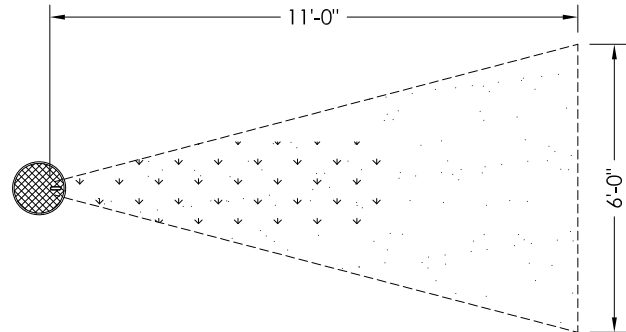

TOP VIEW



Splash Zone-Not to Scale

Splash Zone Notes:

Splash zones are approximate, actual splash may vary based on various environmental conditions, flow rates, slope of splash pad, submergence depth and wind.


PRODUCT OPTIONS

Structure:

Structural Plastic Fabrication
(see specification for details)

DATA

Flow: 10 GPM
Pressure: 4 PSI
Supply Line: 1" Pipe
Installation: Cast in concrete
Electrical: 12VAC

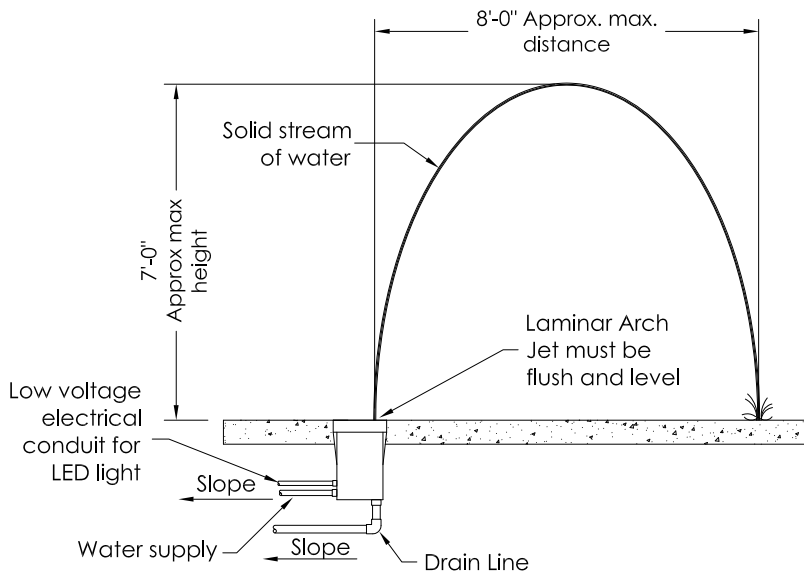

Not for Construction



1101 McKinley Parkway
Delano, MN 55328
888-438-6574
763-972-5200
aquatix.playlsi.com

LAMINAR ARCH JET

DRAWN BY	CTS	SCALE	1/4" = 1'-0"	DATE	9/26/16
REVISED BY	DAB	REVISION LETTER	B	REVISION DATE	3/16/25

This drawing is issued in confidence for engineering information only. This drawing shall remain the property of Aquatix and may not be reproduced, disclosed to a third party, or used to manufacture anything without direct written permission from Aquatix. Unauthorized use shall entitle Aquatix to all damages caused by such user including preparation charges, lost profits, damage to reputation and attorney's fees.