



- 1. Valve must be installed on supply line to regulate flow.
- Concrete mounting surface for structure installation needs to level and flat.
- 3. Supply line is based on the designated flow rates for structure.
- 4. Underground plumbing to be designed for winterization.
- 5. Consult local electrical inspector for grounding.
- 6. Concrete to be rated for 4000 psi minimum before installing structure. Approx. 28 days of curing to reach rate.
- Product may require a strainer on the water feed line. Consult with manufacturer.
- 8. Product specifications are subject to change.

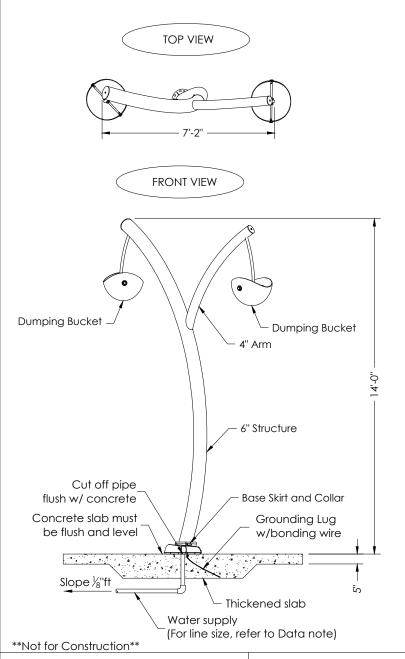

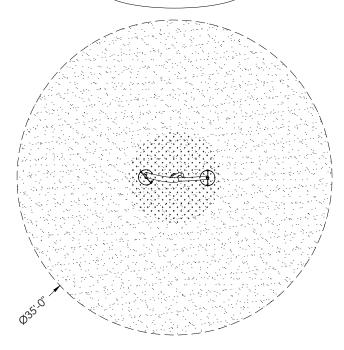


SPLASH ZONE

Splash Zone-Not to Scale

Splash Zone Notes:

Splash zones are approximate, actual splash may vary based on various environmental conditions, flow rates, slope of splash pad, submergence depth and wind.



Structure:

Stainless Steel Fabrication. (see specification for details)

Skir

Fiberglass Fabrication (see specification for details)

Collar

Urethane

(see specification for details)



Flow: 15 TO 25 GPM

Pressure: 7 PSI Supply Line: 1½"

Installation: Flange Mount to Concrete



1101 McKinley Parkway Delano, MN 55328 , 888-438-6574 763-972-5200 aquatix.playlsi.com

BUCKETDUO

 DRAWN BY
 PJ
 SCALE 1/4" = 1'-0"
 DATE 1/10/23

 REVISION BY
 REVISION LETTER
 C
 REVISION DATE 1/31/2025

This drawing is issued in confidence for engineering information only. This drawing shall remain the property of Aquatix and may not be reproduced, disclosed to a third party, or used to manufacture anything without direct written permission from Aquatix. Unauthorized use shall entitle Aquatix to all damages caused by such user including preparation charges, lost profits, damage to reputation and attorney's fees.