

Splash Zone Notes:

Splash zones are approximate, actual splash may vary based on various environmental conditions, flow rates, slope of splash pad and submergence depth.



Built with internal stainless steel bar and expanded mesh, sprayed GFRC sculpted concrete. Theme painted and Clear Coat. Surface mount to concrete pad. Included grounding lug and mounting anchors.


Design Details

SeaCannon - Approximately 48" x 22" x 30" H Arch bar sprays from cannon end

DATA

Flow Rate: 7 GPM Pressure: 4 PSI Supply Line: 1" Pipe

Elevation

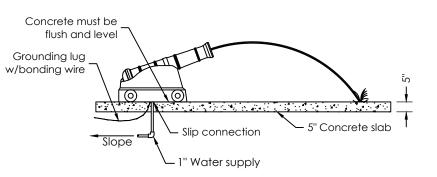

Not for Construction

Bonding wire to

ground lug in structure



1101 McKinley Parkway Delano, MN 55328 888-438-6574 763-972-5200 aquatix.playlsi.com

SEA CANNON

1" sch 80 PVC

supply line

 DRAWN BY
 P.J.
 SCALE 1/4" = 1'- 0"
 DATE 2/18/22

 REVISION BY
 REVISION LETTER
 B
 REVISION DATE
 2/10/2025

This drawing is issued in confidence for engineering information only. This drawing shall remain the property of Aquatix and may not be reproduced, disclosed to a third party, or used to manufacture anything without direct written permission from Aquatix. Unauthorized use shall entitle Aquatix to all damages caused by such user including preparation charges, lost profits, damage to reputation and attorney's fees.