


NOTES

1. Valve must be installed on supply line to regulate flow.
2. Concrete mounting surface for structure installation needs to be level and flat.
3. Supply line is based on the designated flow rates for structure.
4. Underground plumbing to be designed for winterization.
5. Consult local electrical inspector for grounding.
6. Concrete to be rated for 4000 psi minimum before installing structure. Approx. 28 days of curing to reach rate.
7. Product may require a strainer on the water feed line. Consult with manufacturer.
8. Product specifications are subject to change.

SPLASH ZONE

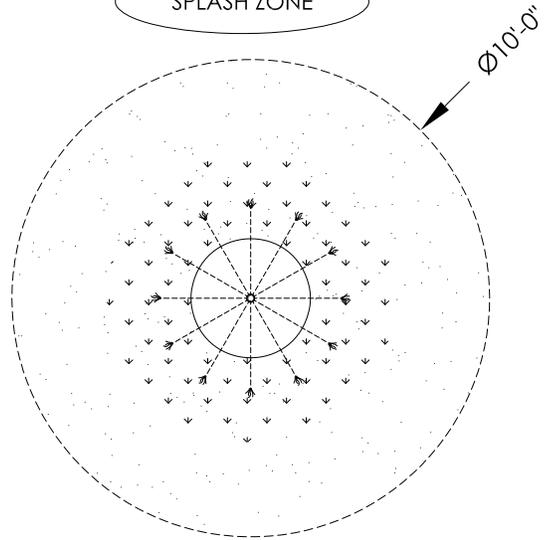


Splash Zone-Not to Scale


Splash Zone Notes:

Splash zones are approximate, actual splash may vary based on various environmental conditions, flow rates, slope of splash pad, submergence depth and wind.

TOP VIEW

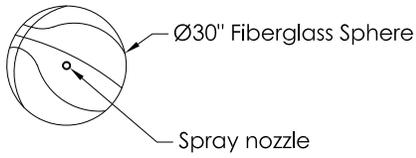

SIDE VIEW

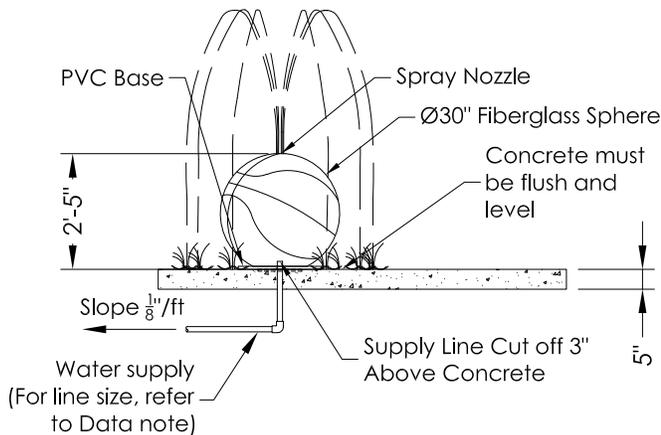

PRODUCT OPTIONS

Structure:

Fiberglass Fabrication  
(see specification for details)

Theme Paint:

Sphere can be theme painted for any ball sport.

DATA

Flow: 15 GPM  
 Pressure: 4 PSI  
 Supply Line: 1" Pipe  
 Installation: Flange Mount to Concrete

\*\*Not for Construction\*\*

1101 McKinley Parkway  
 Delano, MN 55328  
 888-438-6574  
 763-972-5200  
 aquatix.playlsi.com

SPORT GLOBE			
DRAWN BY	JMJ	SCALE	1/4" = 1'-0"
REVISOR BY	DAB	REVISION LETTER	B
DATE	1/11/19	REVISION DATE	2/6/25

This drawing is issued in confidence for engineering information only. This drawing shall remain the property of Aquatix and may not be reproduced, disclosed to a third party, or used to manufacture anything without direct written permission from Aquatix. Unauthorized use shall entitle Aquatix to all damages caused by such user including preparation charges, lost profits, damage to reputation and attorney's fees.